
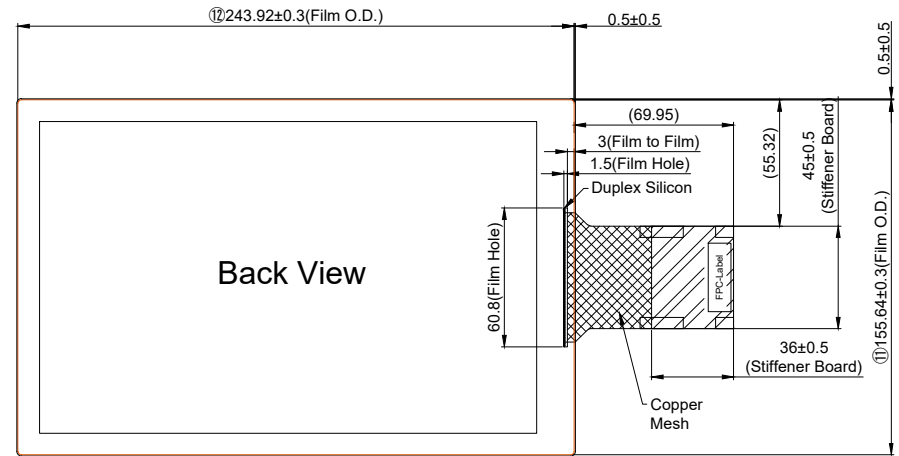


Molex
53261-0471

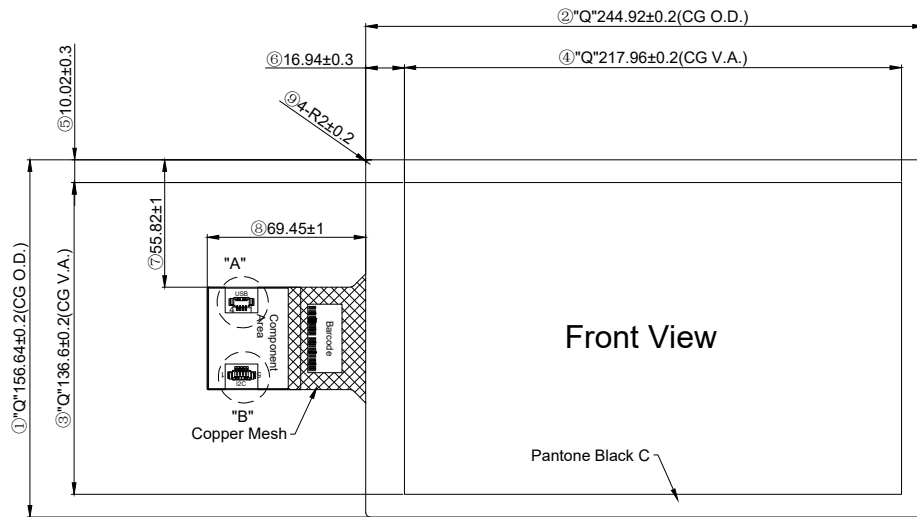

Detail A
Scale 2:1

1. Pin Assignment

USB		I2C	
1	VCC_5V	1	VCC_5V
2	D-	2	SCL
3	D+	3	SDA
4	GND	4	INT
		5	GND

Molex
53261-0571



Detail B
Scale 2:1


2. Material Characteristics

Property	Requirement
Transmittance	88±2%
Surface hardness	7H
Operating temperature	-30 ~ 80 °C
Storage temperature	-40 ~ 85 °C
Operating Humidity	20 ~ 90% RH (Max.50 °C)
Storage Humidity	20 ~ 90% RH (Max.50 °C)

3. Tolerance no specified : ± 0.30mm

4. Marked the size of the "Q" key measurement size

5. The head of FPC can not pulled



6. Component area of stiffener board on FPC can not be bent.

