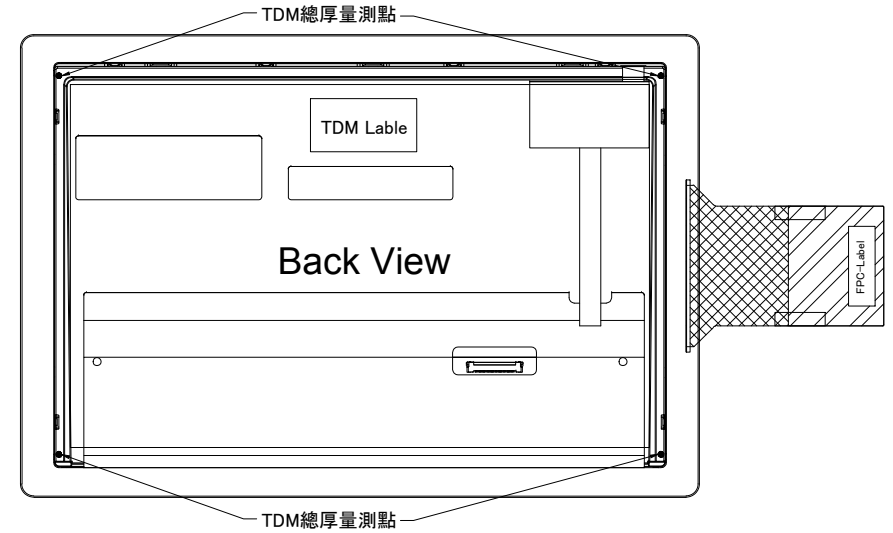
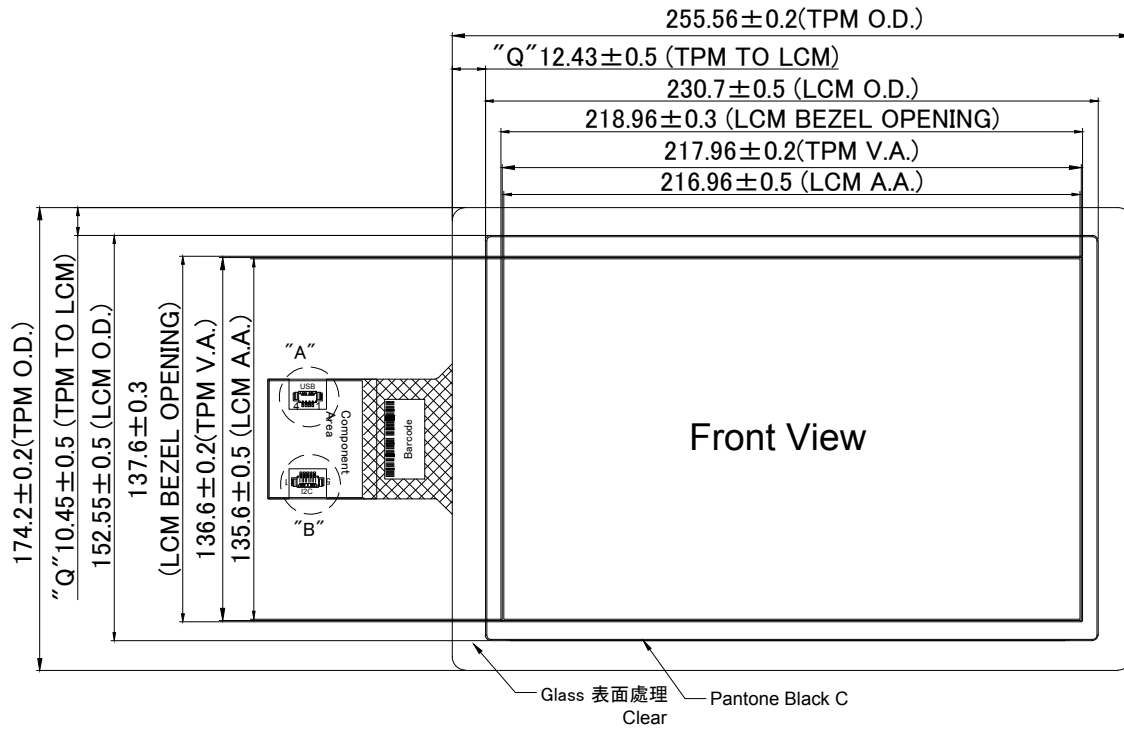


#### 1. Material Characteristics

| Property              | Requirement                  |
|-----------------------|------------------------------|
| Luminance             | 344 cd/m <sup>2</sup> (Min.) |
| Surface hardness      | 7H                           |
| Operating temperature | -30 ~ 80 °C                  |
| Storage temperature   | -40 ~ 85 °C                  |
| Operating Humidity    | 20 ~ 90% RH                  |
| Storage Humidity      | 20 ~ 90% RH                  |

- Operating Humidity from 20% to 90%, no dew condensation shall be acceptable.
- Storage Humidity from 20% to 90%, no dew condensation shall be acceptable.

- Tolerance no specified :  $\pm 0.50\text{mm}$
- Marked the size of the "Q" key measurement size.

- LCM PIN ASSIGNMENT Please refer to LCM SPEC.

- LCM MODEL NO. : INNOLUX G101ICE-LH1.


#### 8. TOUCH PANEL PIN ASSIGNMENT

| USB |        | I2C |        |
|-----|--------|-----|--------|
| 1   | VCC_5V | 1   | VCC_5V |
| 2   | D-     | 2   | SCL    |
| 3   | D+     | 3   | SDA    |
| 4   | GND    | 4   | INT    |
|     |        | 5   | GND    |

#### 9. LCM Color Chromaticity

|    |       |
|----|-------|
| Wx | 0.313 |
| Wy | 0.329 |

10. The head of FPC can not be pulled.



11. Component area of stiffener board on FPC can not be bent.



Molex 53261-0471



Detail A  
Scale 2:1

Molex 53261-0571



Detail B  
Scale 2:1