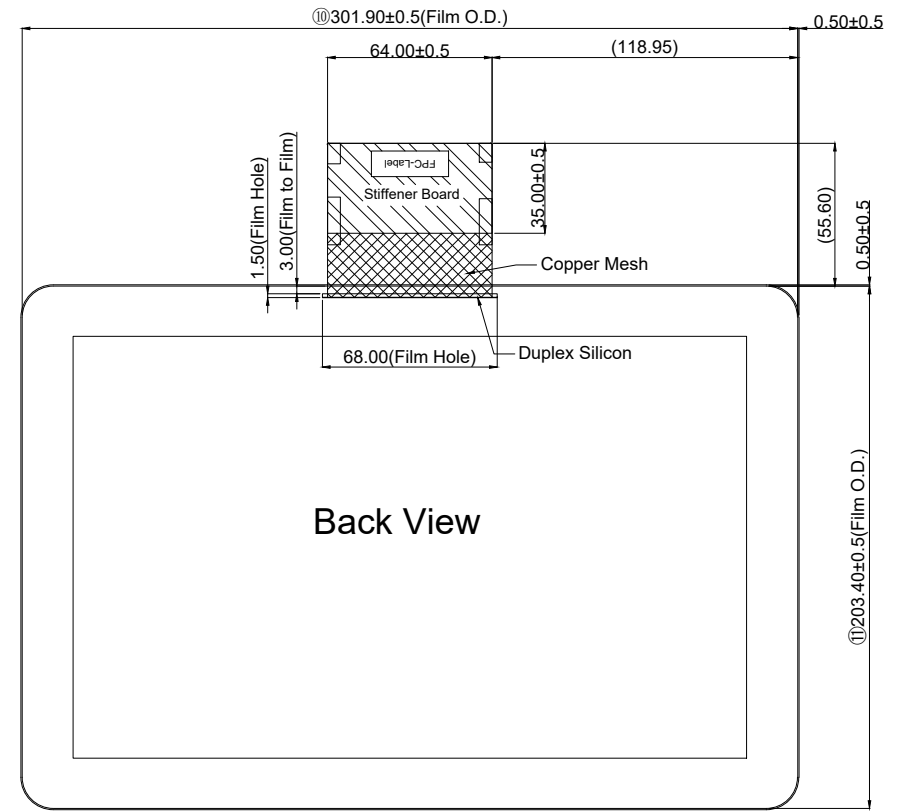
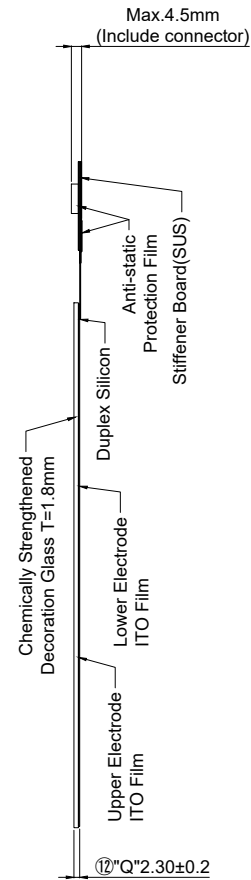
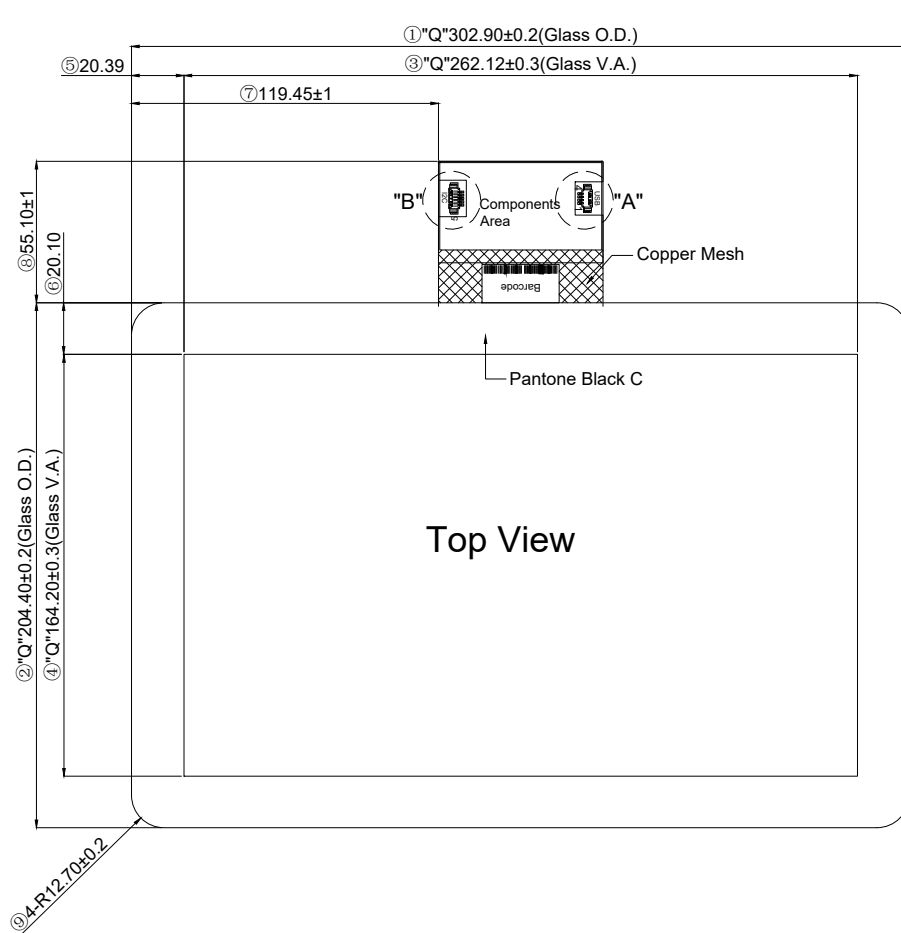


1. PIN ASSIGNMENT

USB		I ² C	
1	VCC_5V	1	VCC_5V
2	D-	2	SCL
3	D+	3	SDA
4	GND	4	INT
		5	GND


2. Material Characteristics

Property	Requirement
Transmittance	88±2 %
Surface hardness	7H
Operating temperature	-30 ~ 80 °C
Storage temperature	-40 ~ 85 °C
Operating Humidity	20 ~ 90% RH (Max.50 °C)
Storage Humidity	20 ~ 90% RH (Max.50 °C)

3. Tolerance no specified : ± 0.30mm

4. Marked the size of the "Q" key measurement size

5. The head of FPC can not pulled



6. Component area of stiffener board on FPC can not be bent.

