



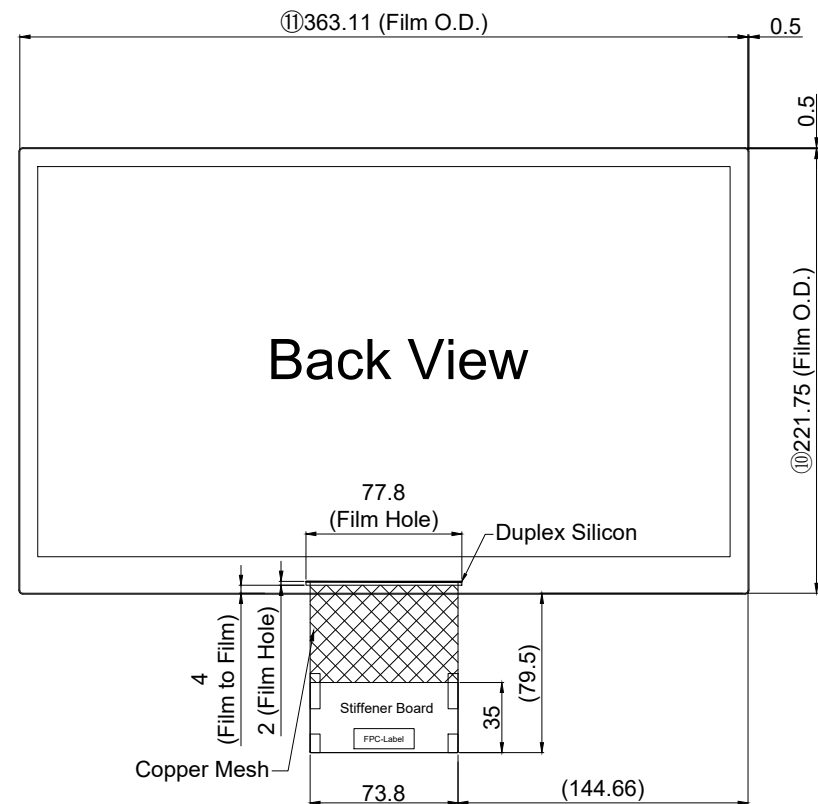

Molex 53261-0471

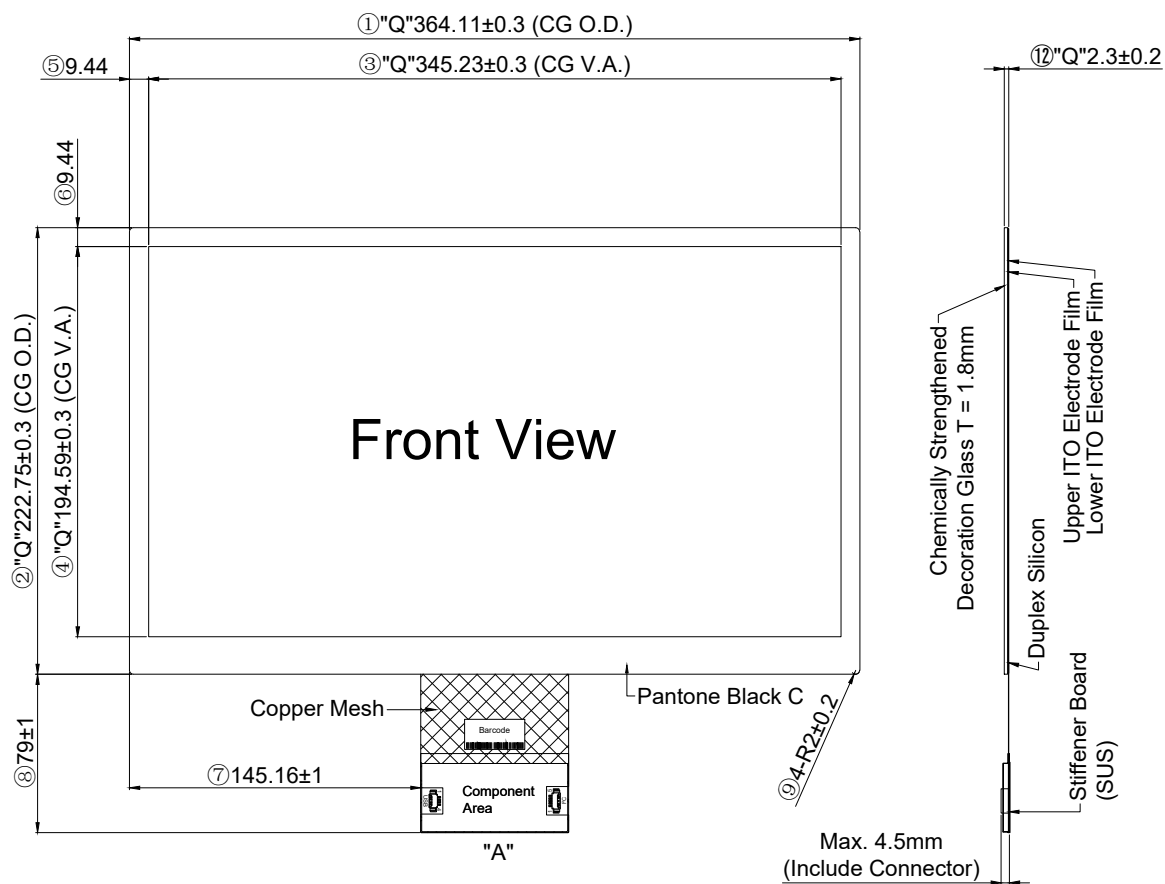

1.Pin Assignment

USB	
1	VCC_5V
2	D-
3	D+
4	GND

Molex 53261-0571



2.Pin Assignment

I ² C	
1	VCC_5V
2	SCL
3	SDA
4	INT
5	GND

Detail A
Scale 4:1


3. Material Characteristics

Property	Requirement
Transmittance	88±2 %
Surface hardness	7H
Operating temperature	-30 ~ 80 °C
Storage temperature	-40 ~ 85 °C
Operating Humidity	20 ~ 90% RH (Max.50 °C)
Storage Humidity	20 ~ 90% RH (Max.50 °C)

4.Tolerance no specified : ± 0.50mm

5.Marked the size of the "Q" key measurement size

6.The head of FPC can not pulled



7.Commonpnt area of stiffener board on FPC can not be bent.

