

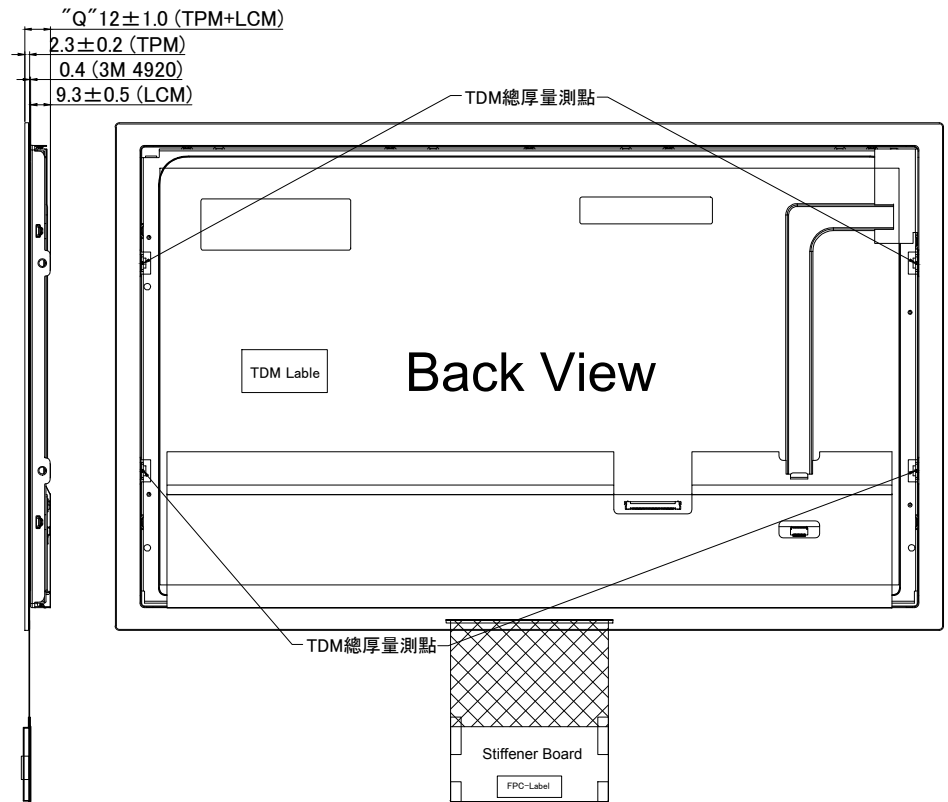


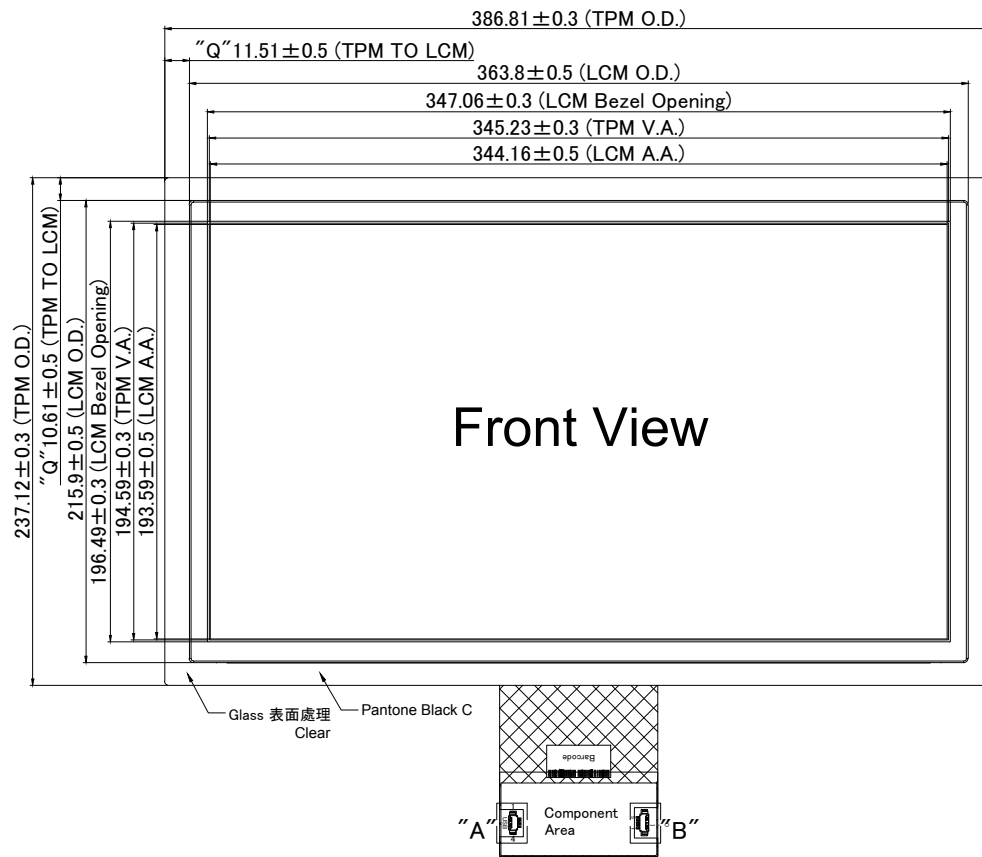


Molex 53261-0471



Detail A
Scale 4:1

Molex 53261-0571



Detail B
Scale 4:1

1. Material Characteristics

Property	Requirement
Luminance	260 cd/m ² (Min.)
Surface hardness	7H
Operating temperature	-30 ~ 80 °C
Storage temperature	-40 ~ 85 °C
Operating Humidity	20 ~ 90% RH(max. 50°C)
Storage Humidity	20 ~ 90% RH(max. 50°C)

- Operating Humidity from 20% to 90%, no dew condensation shall be acceptable.
- Storage Humidity from 20% to 90%, no dew condensation shall be acceptable.
- Tolerance no specified : ± 0.50mm
- Marked the size of the "Q" key measurement size.
- LCM PIN ASSIGNMENT Please refer to LCM SPEC.
- LCM MODEL NO. : Innolux G156HCE-L01.


8. TOUCH PANEL PIN ASSIGNMENT

USB		I ² C	
1	VCC_5V	1	VCC_5V
2	D-	2	SCL
3	D+	3	SDA
4	GND	4	INT
		5	GND

9.LCM Color Chromaticity

Wx	0.313
Wy	0.329

10.The head of FPC can not pulled.



11.Commonpnt area of stiffener board on FPC can not be bent.

