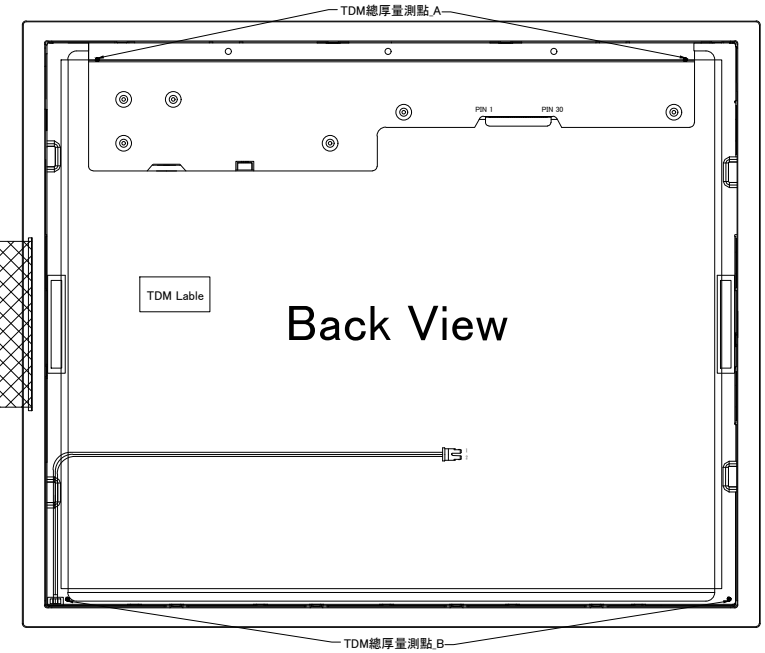


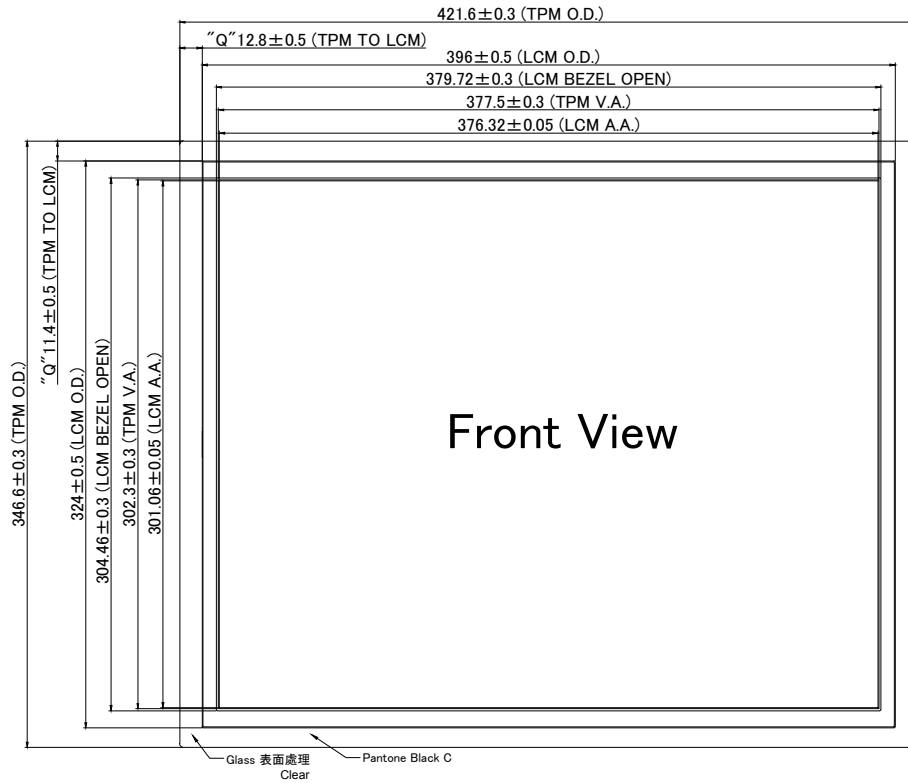


1. Material Characteristics

Property	Requirement
Luminance	680 cd/m ² (Min.)
Surface hardness	7H
Operating temperature	-20 ~ 70 °C
Storage temperature	-30 ~ 80 °C
Operating Humidity	20 ~ 90% RH(max. 50°C)
Storage Humidity	20 ~ 90% RH(max. 50°C)

2. Operating Humidity from 20% to 80%, no dew condensation shall be acceptable.

3. Storage Humidity from 90% to 80%, no dew condensation shall be acceptable.

4. Tolerance no specified : ± 0.50mm

5. Marked the size of the "Q" key measurement size.

6. LCM PIN ASSIGNMENT Please refer to LCM SPEC.

7. LCM MODEL NO. : L-MIL-1190M001A1-1.


8. TOUCH PANEL PIN ASSIGNMENT

USB		I2C	
1	VCC_5V	1	VCC_5V
2	D-	2	SCL
3	D+	3	SDA
4	GND	4	INT
		5	GND

9. LCM Color Chromaticity

Wx	0.32
Wy	0.34

10. The head of FPC can not be pulled.



11. Component area of stiffener board on FPC can not be bent.



Molex 53261-0471



A Detail
Scale 4:1

Molex 53261-0571

