



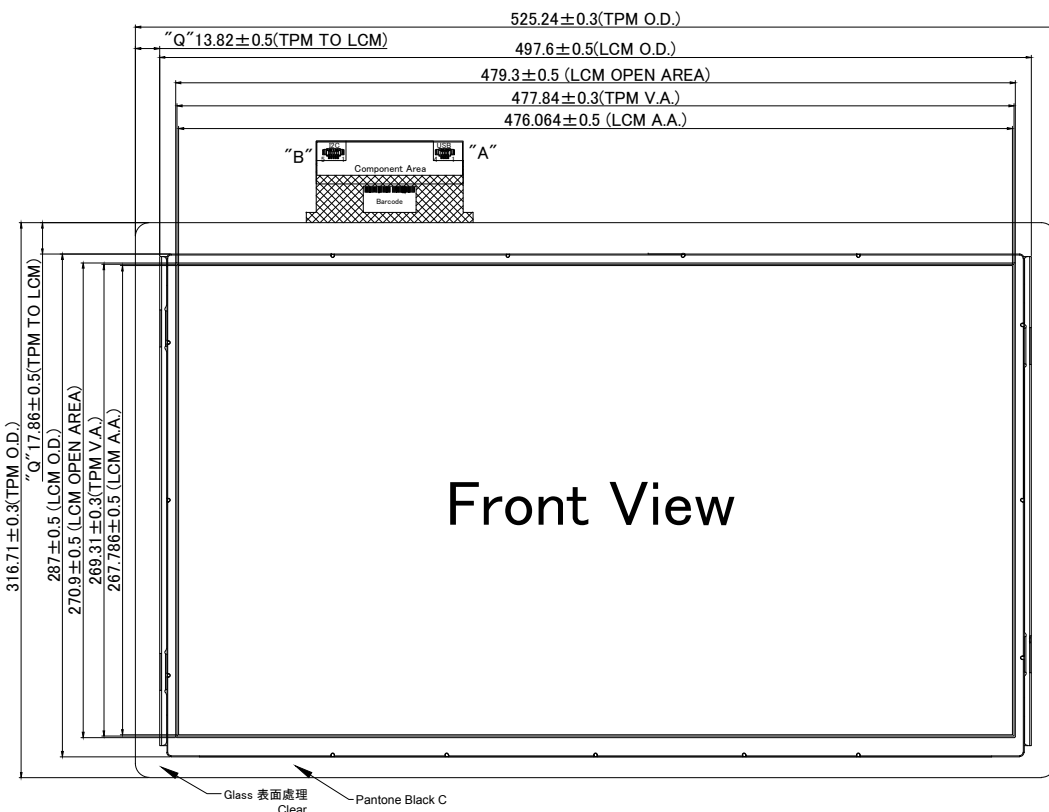


Molex 53261-0471



Detail A
Scale 4:1

Molex 53261-0571



Detail B
Scale 4:1

1. Material Characteristics

Property	Requirement
Luminance	270 cd/m^2 (Min.)
Surface hardness	7H
Operating temperature	$0 \sim 60^\circ\text{C}$
Storage temperature	$-20 \sim 60^\circ\text{C}$
Operating Humidity	$20 \sim 90\% \text{ RH}$
Storage Humidity	$20 \sim 90\% \text{ RH}$

2. Operating Humidity from 20% to 90%, no dew condensation shall be acceptable.


3. Storage Humidity from 20% to 90%, no dew condensation shall be acceptable.

4. Tolerance no specified : $\pm 0.50\text{mm}$

5. Marked the size of the "Q" key measurement size.

6. LCM PIN ASSIGNMENT Please refer to LCM SPEC.

7. LCM MODEL NO. : INNOLUX G215HCJ-L01.

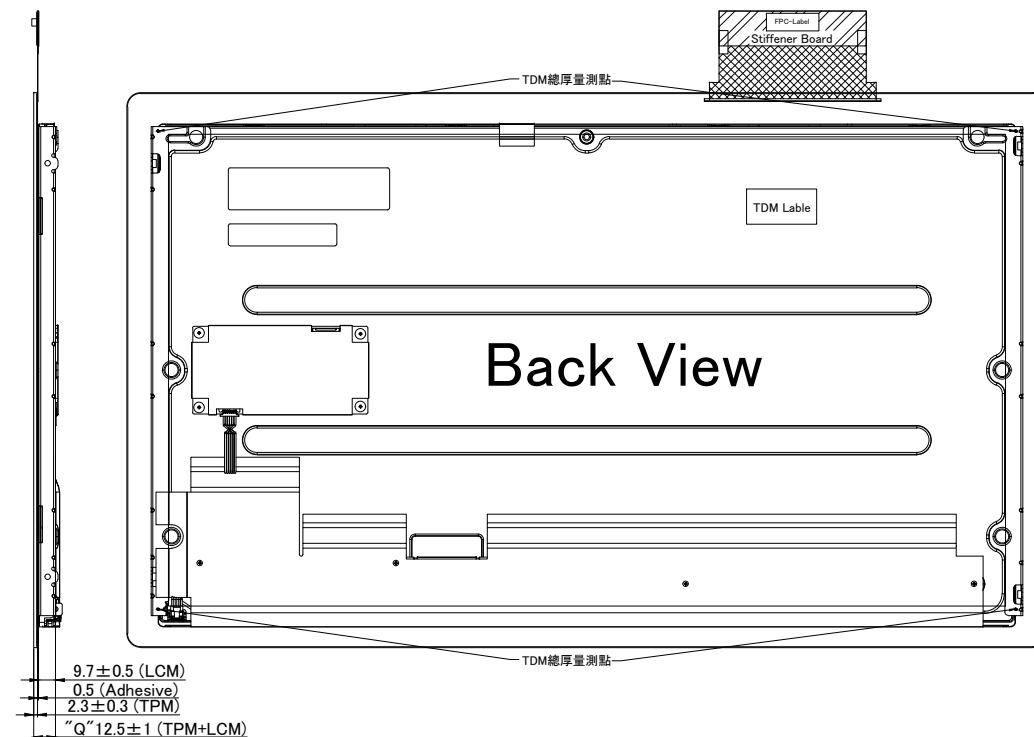


8. TOUCH PANEL PIN ASSIGNMENT

USB		I2C	
1	VCC_5V	1	VCC_5V
2	D-	2	SCL
3	D+	3	SDA
4	GND	4	INT
		5	GND

9. LCM Color Chromaticity

Wx	0.313
Wy	0.329

10. The head of FPC can not pulled.



11. Component area of stiffener board on FPC can not be bent.

