
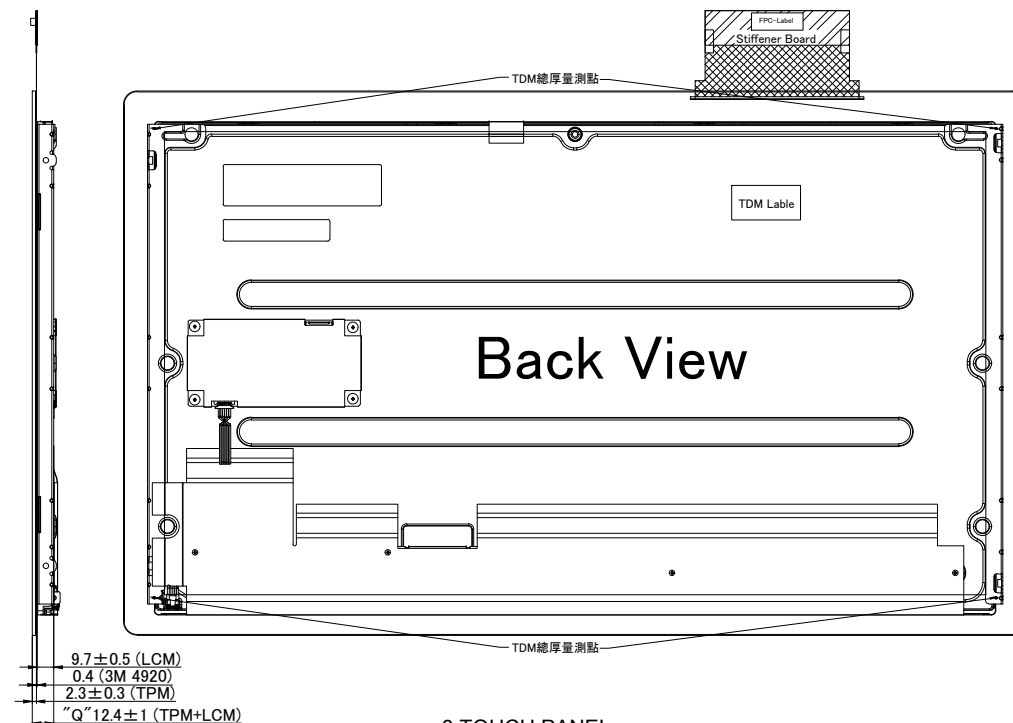
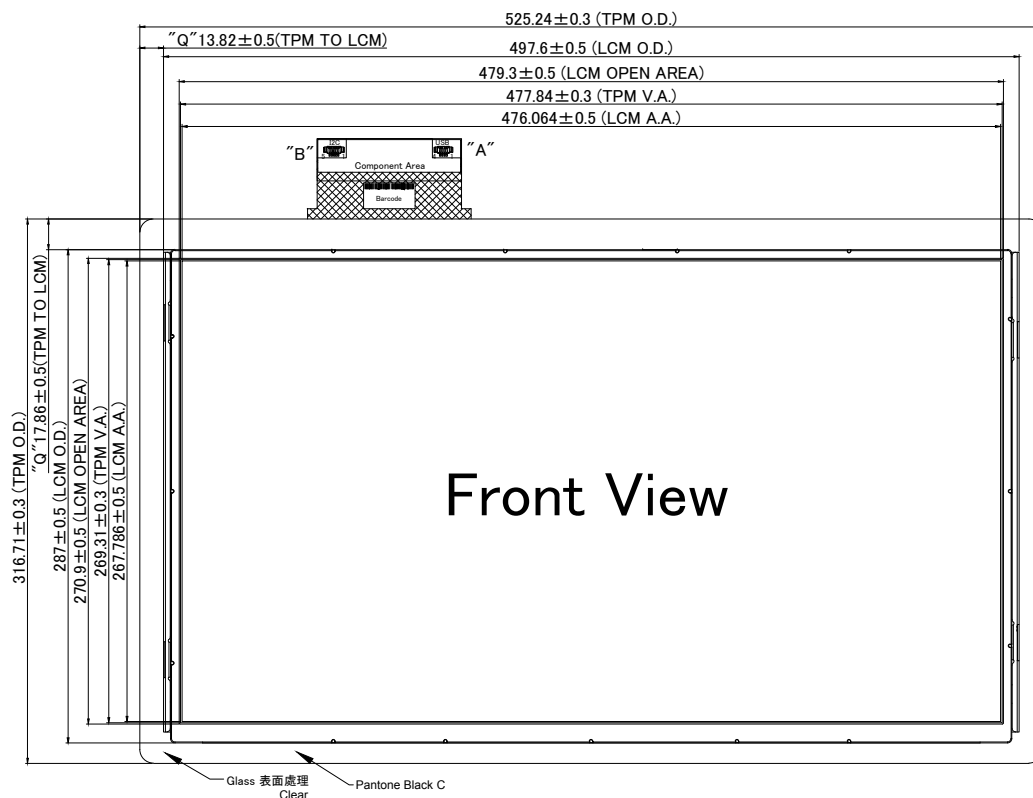


Detail A
Scale 4:1



Detail B
Scale 4:1

1. Material Characteristics

Property	Requirement
Luminance	246 cd/m ² (Min.)
Surface hardness	7H
Operating temperature	0 ~ 60 °C
Storage temperature	-20 ~ 60 °C
Operating Humidity	20 ~ 90% RH(max. 50°C)
Storage Humidity	20 ~ 90% RH(max. 50°C)

2. Operating Humidity from 20% to 90%, no dew condensation shall be acceptable.

3. Storage Humidity from 20% to 90%, no dew condensation shall be acceptable.

4. Tolerance no specified : ± 0.50mm

5. Marked the size of the "Q" key measurement size.

6. LCM PIN ASSIGNMENT Please refer to LCM SPEC.

7. LCM MODEL NO. : INNOLUX G215HCJ-L01.


8. TOUCH PANEL PIN ASSIGNMENT

USB		I2C	
1	VCC_5V	1	VCC_5V
2	D-	2	SCL
3	D+	3	SDA
4	GND	4	INT
		5	GND

9. LCM Color Chromaticity

Wx	0.313
Wy	0.329

10. The head of FPC can not pulled.



11. Common area of stiffener board on FPC can not be bent.

